

## TECHNICAL REPORT ARCCB-TR-96006

EPITAXIAL QUALITY OF THIN Ag FILMS ON GaAs(100)  
SURFACES CLEANED WITH VARIOUS WET ETCHING TECHNIQUES

K. E. MELLO  
S. R. SOSS  
S. P. MURARKA  
T. M. LU  
S. L. LEE

19960530 045

MARCH 1996



US ARMY ARMAMENT RESEARCH,  
DEVELOPMENT AND ENGINEERING CENTER  
CLOSE COMBAT ARMAMENTS CENTER  
BENÉT LABORATORIES  
WATERVLIET, N.Y. 12189-4050



APPROVED FOR PUBLIC RELEASE; DISTRIBUTION UNLIMITED

DTIC QUALITY INSPECTED 1

#### DISCLAIMER

The findings in this report are not to be construed as an official Department of the Army position unless so designated by other authorized documents.

The use of trade name(s) and/or manufacturer(s) does not constitute an official indorsement or approval.

#### DESTRUCTION NOTICE

For classified documents, follow the procedures in DoD 5200.22-M, Industrial Security Manual, Section II-19 or DoD 5200.1-R, Information Security Program Regulation, Chapter IX.

For unclassified, limited documents, destroy by any method that will prevent disclosure of contents or reconstruction of the document.

For unclassified, unlimited documents, destroy when the report is no longer needed. Do not return it to the originator.

# REPORT DOCUMENTATION PAGE

Form Approved  
OMB No. 0704-0168

Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.

1. AGENCY USE ONLY (Leave blank)		2. REPORT DATE March 1996	3. REPORT TYPE AND DATES COVERED Final	
4. TITLE AND SUBTITLE EPITAXIAL QUALITY OF THIN Ag FILMS ON GaAs(100) SURFACES CLEANED WITH VARIOUS WET ETCHING TECHNIQUES			5. FUNDING NUMBERS AMCMS No. 6226.24.H180.0 PRON No. TU5B5F261ABJ	
6. AUTHOR(S) K.E. Mello (RPI, Troy, NY), S.R. Soss (RPI), S.P. Murarka (RPI), T.M. Lu (RPI), and S.L. Lee				
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) U.S. Army ARDEC Benet Laboratories, AMSTA-AR-CCB-O Watervliet, NY 12189-4050			8. PERFORMING ORGANIZATION REPORT NUMBER ARCCB-TR-96006	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) U.S. Army ARDEC Close Combat Armaments Center Picatinny Arsenal, NJ 07806-5000			10. SPONSORING/MONITORING AGENCY REPORT NUMBER	
11. SUPPLEMENTARY NOTES Submitted to <i>Applied Physics Letters</i> .				
12a. DISTRIBUTION AVAILABILITY STATEMENT Approved for public release; distribution unlimited.			12b. DISTRIBUTION CODE	
13. ABSTRACT (Maximum 200 words)  Two theta scans and pole figure X-ray analyses have been used to examine the crystal structure and orientation of Ag films deposited on GaAs(100) substrates cleaned by a variety of wet etches. Where epitaxy was observed, it was of the type Ag(110)/GaAs(100). The H <sub>3</sub> PO <sub>4</sub> /HCl sequential etch yielded the film with the highest degree of preferred orientation, with the H <sub>2</sub> SO <sub>4</sub> /HCl, NH <sub>4</sub> OH, and HF etches producing films of decreasing quality in the order named. The epitaxial quality is thought to scale with elemental As concentration on the GaAs(100) surface, and have an inverse relationship to the amount of surface oxides present before deposition.				
14. SUBJECT TERMS Epitaxial Growth, Surface Cleaning, Chemical Etching			15. NUMBER OF PAGES 11	
			16. PRICE CODE	
17. SECURITY CLASSIFICATION OF REPORT UNCLASSIFIED	18. SECURITY CLASSIFICATION OF THIS PAGE UNCLASSIFIED	19. SECURITY CLASSIFICATION OF ABSTRACT UNCLASSIFIED	20. LIMITATION OF ABSTRACT UL	

## TABLE OF CONTENTS

	<u>Page</u>
ACKNOWLEDGEMENTS .....	ii
INTRODUCTION .....	1
EXPERIMENTAL PROCEDURE .....	1
OBSERVATIONS .....	2
CONCLUSION .....	3
REFERENCES .....	4

### TABLES

1. Cleaning techniques employed .....	5
2. X-ray peak intensity ratios .....	5

### LIST OF ILLUSTRATIONS

1. Specimen geometry relative to the x-ray source and detector, showing angles $2\theta$ , $\chi$ , and azimuthal angle $\phi$ .....	6
2. $2\theta$ scans representing the four different wet etches of GaAs(100) .....	7
3. 3-D stereographic projections showing the Ag(111) poles .....	8
4. Ag(110) on GaAs(100) $\chi$ scans, showing the azimuthal character of the epitaxy using the four cleaning techniques .....	9

## ACKNOWLEDGEMENTS

This work was supported by the National Science Foundation, grant number NSF ECS-9310613. We thank G. R. Yang for performing the XPS experiments.

## INTRODUCTION

The nature and quality of metal/semiconductor interfaces are of considerable importance in device applications. The thickness and nature of surface oxides can have a significant impact on Schottky diode behavior and ohmic contact formation.<sup>[1-2]</sup> A number of wet cleaning procedures have been developed to prepare semiconductor substrates for molecular-beam epitaxy (MBE) growth and for device fabrication.<sup>[1,3,4]</sup> Generally, the treated GaAs surface should be smooth, have no metallic contaminants, be free of oxides, and have a Ga/As ratio of unity. Often, the cleaning procedure begins with a degreasing cycle in which the wafer is immersed in hot acetone and methanol, and rinsed in DI water. The wafer surface is then oxidized by an oxidizing agent (typically OH<sup>-</sup> from H<sub>2</sub>O<sub>2</sub>) to produce As<sub>2</sub>O<sub>3</sub>, As<sub>2</sub>O<sub>5</sub>, Ga<sub>2</sub>O<sub>3</sub>, Ga<sub>2</sub>O<sub>3</sub>(H<sub>2</sub>O), and the Ga suboxide Ga<sub>2</sub>O. Finally, the oxidation products are removed by an acid or a base. Typically, both the acid or base and the H<sub>2</sub>O<sub>2</sub> are in solution, and the oxide formation and removal occur simultaneously. Acids used include sulfuric (H<sub>2</sub>SO<sub>4</sub>), phosphoric (H<sub>3</sub>PO<sub>4</sub>), citric (C<sub>6</sub>H<sub>8</sub>O<sub>7</sub>), hydrochloric (HCl), and hydrofluoric (HF). HF buffered with ammonium fluoride (FH<sub>4</sub>N) is also used. Surface oxides and contaminants present after wet etching have been studied mainly by X-ray photoelectron spectroscopy (XPS).<sup>[2,5,6]</sup>

The quality of epitaxial thin films is extremely sensitive to the surface condition immediately prior to deposition. This report investigates the orientational characteristics of thin Ag films on GaAs(100) substrates cleaned by various wet-etching techniques. Two theta scans and pole figure X-ray analyses on the Ag/GaAs(100) samples were performed to determine the crystal structure of the Ag overlayers and any epitaxial orientations of the films to the GaAs(100) substrates. The substrates were cleaned with various wet-etching schemes using phosphoric, sulfuric, hydrochloric, and hydrofluoric acid-based etches and an ammonium hydroxide etch.

## EXPERIMENTAL PROCEDURE

The substrate in all cases was an *n*-doped GaAs(100) wafer prepared using four different cleaning techniques as shown in Table 1. The partially ionized beam (PIB) deposition technique used to deposit the Ag films has been previously described.<sup>[7]</sup> Briefly, a small fraction (0-5%) of the evaporated species is ionized by the electrons used to heat the crucible by electron bombardment. The self ions are then accelerated toward the substrate by an accelerating potential difference between the crucible and substrate and are deposited along with the neutral species. Deposition conditions were: substrate at room temperature; base pressure less or equal to  $2 \times 10^{-5}$  Pa; deposition rate approximately equal to 4.0 angstroms/sec; and final film thickness approximately equal to 800 angstroms. All depositions were carried out with a "floating" substrate potential, in which the substrate is left electrically isolated during deposition. The "floating" condition was seen previously to optimize epitaxial Ag film quality in our PIB deposition system.<sup>[12]</sup> The floating substrate potential represents a unique situation. Due to the 600-1,000 V positive bias on the crucible present for electron bombardment heating, ions are definitely present in the beam and are repelled to all areas of the chamber at a lower potential, including the substrate. However, because the substrate rapidly charges up due to ion impact, the ions enter into the film growth mainly in the initial stages. This is precisely the stage at

which they would be most helpful in facilitating epitaxial growth because of their ability to provide additional energy to the growth front and sputter away light impurities on the substrate surface.<sup>[8-10]</sup>

After growth, the samples were characterized using a Scintag X-ray diffraction system 2000. Two theta scans determined the grains present in the film, while a pole figure analysis determined the azimuthal orientation of these grains relative to the substrate. In the pole figure analysis<sup>[11]</sup>, a two theta angle is set for the plane of interest, then the sample is tilted incrementally from 0° to 80°. At each increment the sample is rotated 360° azimuthally (see Figure 1). The result is a stereogram that reveals the poles (or normals) from each plane in the family. If the stereogram contains rings of intensity, the planes are randomly oriented in the film, whereas spots (or poles) of intensity reveal a preferred orientation in the film and give their exact azimuthal orientation. Comparing the stereograms of the substrate and film determines the exact orientation of the film relative to the substrate.

## OBSERVATIONS

The epitaxy observed in all cases was Ag(110)/GaAs(100). However, the epitaxial quality varies with the cleaning technique employed. The H<sub>3</sub>PO<sub>4</sub>/HCl sequential etch has the smallest Ag(111)/Ag(110) two theta intensity ratio, followed by the H<sub>2</sub>SO<sub>4</sub>/HCl etch, and finally the NH<sub>4</sub>OH and HF etches. Thus, the sample cleaned with the H<sub>3</sub>PO<sub>4</sub>/HCl sequential etch has the largest portion of Ag(110) grains, and the HF sample the smallest. These results are summarized in Table 2 and Figure 2. The stereograms of Figure 3 show the Ag(111) poles present in the film. Only the Ag(111) poles were examined because reflections from Ag(200) and GaAs(220) occur at nearly the same two theta angle. The same is true for the Ag(220) and GaAs(400) reflections. When probing the Ag(100) and Ag(110) poles, only the more powerful substrate reflections occur in the stereograms. The predominant (111) poles in the stereograms of Figure 3 occur at 35.3°: the Ag(111) poles from the Ag(110) grains. In principle, one should see poles at 35.3° with two-fold symmetry and poles at 90° with four-fold symmetry. The poles at 90° are not observed because the  $\chi$ -tilt angle is restricted to 80°.

In the H<sub>3</sub>PO<sub>4</sub>/HCl etched sample, the poles at 35.3° are very sharp and tight, indicating that the Ag(110) grains have little tilt grain-to-grain and are all similarly azimuthally oriented. The Ag(111) poles of the H<sub>2</sub>SO<sub>4</sub>/HCl etched sample are broader, indicating a less exact orientation of the Ag(110) grains. The NH<sub>4</sub>OH etched sample is poorer still. In the stereogram of the HF etched sample, there are no Ag(111) poles at 35.3°, because little to no Ag(110) grains are present in the film. Instead, a large central (111) pole is present, indicating that the primary grains present are Ag(111), as is clearly seen in the two theta scan of the HF etched sample in Figure 2. The uniform intensity in other areas of the stereogram shows that these (111) planes are stacked randomly and have no preferred azimuthal orientation.

Another more simple view is presented in Figure 4. These "chi" scans are obtained by fixing the tilt angle and rotating the sample 360° azimuthally. For Ag(110) on GaAs(100), the two theta angle was first set to the (111) poles of Ag; the sample normal was then tilted by 35.3°

to the diffractometer plane, which corresponds to the angle between the (111) and (110) planes in a cubic crystal. The azimuthal scan was then performed by rotating the sample  $360^\circ$ . For the substrate, the two theta angle was set to the GaAs(111) poles and the tilt-angle to  $54.7^\circ$ , which corresponds to the angle between the (100) and (111) planes of the cubic structure, then an azimuthal scan was similarly performed. The GaAs wafer reflects four (111) peaks under rotation through  $360^\circ$ , since there are four equivalent (111) poles in the (100) projection. Because the two peaks from the Ag(111) poles align with two of the (111) poles of the GaAs(100) substrate, the azimuthal character of the epitaxy is revealed.

High-quality epitaxial Ag(110) films on GaAs(100) surfaces can be obtained with an HF dip.<sup>[12]</sup> This work was previously reported in Reference 12. The essentially non-epitaxial film obtained here had the same HF dip, but was subsequently rinsed in DI water. It is known that GaAs(100) etched in HF and blow-dried in  $N_2$  yields an oxide thickness of only about 12 angstroms.<sup>[1]</sup> Presumably the DI water rinse increases the oxide layer thickness, although this is reported not to occur.<sup>[5]</sup> Controlling oxide thickness is important because in metallizing GaAs for ohmic contact formation and for nearly ideal Schottky diode behavior, the residual dielectric layer thickness must be reduced to a minimum. This suggests that, of the four techniques examined here, the  $H_3PO_4/HCl$  sequential etch applied to GaAs(100) provides the most favorable surface condition for the epitaxial growth of Ag. Lu et al.<sup>[2]</sup> conducted XPS studies of the GaAs(100) surface after the  $HP_3O_4/HCl$  and  $H_2SO_4/HCl$  sequential etches and found that the former left a more As-rich surface than the latter. In addition, it was noted that elemental As increased in concentration as the surface oxides decreased. A similar study by Olivier et al.<sup>[5]</sup> concluded that an  $NH_4OH$  etch left a more As-rich surface than an HF etch. Our own XPS studies of the substrates immediately after etching agree with the above and show that the HF etched sample has more surface  $As_2O_3$  than the  $H_3PO_4/HCl$  etched sample. These results suggest that a wet etch can improve epitaxial quality in the Ag(110)/GaAs(100) system by leaving more elemental As on the surface. The more As-rich surfaces have less oxides present,<sup>[2]</sup> which may facilitate epitaxial growth.

## CONCLUSION

In conclusion, it was found that thin Ag films deposited on GaAs etched with an  $H_3PO_4/HCl$  sequential etch provided the best epitaxial quality, followed by  $H_2SO_4/HCl$ ,  $NH_4OH$ , and finally HF. A correlation was found between the epitaxial quality and probable elemental As concentration on the surface. These results suggest that the surface condition of GaAs(100) varies markedly with the cleaning technique employed. Thus, selecting the appropriate etching scheme (and corresponding surface condition) can favorably affect epitaxial formation condition, by controlling the orientation of the grown overlayer.



## REFERENCES

1. Mukherjee, S. D., Woodward, D., in *Gallium Arsenide Materials, Devices and Circuits*, edited by M. J. Howes, D. V. Morgan, Wiley, New York, **1985**, pp. 123, 148-149.
2. Lu, Z. H., Lagarde, C., Sacher E., Currie, J. F., and Yelon, A., *J. Vac. Sci. Technol. A* **7**, 3, **1989**.
3. Williams, R. E., *Gallium Arsenide Processing Techniques*, Artech, Massachusetts, **1984**, p. 93.
4. Sze, S. M., *VLSI Technology*, McGraw-Hill, New York, **1983**, p. 37.
5. Olivier, J., Landesman, J. P., and Wyczisk, F., *Inst. Phys. Conf. Ser. No. 112*, 305, **1990**.
6. Menda, K., Kanda, E., and Yokoyama, T., *Jap. J. Appl. Phys.* **29**, L391, **1990**.
7. Mei, S. N., and Lu, T. M., *J. Vac. Sci. Technol. A* **6**, 9, **1988**.
8. Yapsir, A. S., Lu, T. M., and Lanford, W. A., *Appl. Phys. Lett.* **52**, 1962, **1988**.
9. Yang, G. R., Bai, P., Lu, T. M., and Lau, W. M., *J. Appl. Phys.* **66**, 4519, **1989**.
10. Bai, P., Yang, G. R., and Lu, T. M., *J. Appl. Phys.* **68**, 3619, **1990**.
11. Cullity, B. D., *Elements of X-ray Diffraction*, Addison-Wesley, Reading, Massachusetts, **1978**, p. 297.
12. Nason, T. C., You, L., and Lu, T. M., *Appl. Phys. Lett.* **60**, 175, **1992**.

**TABLE 1. Cleaning techniques employed. Each column represents the sequence of a particular cleaning procedure.**

<b>I</b>	<b>II</b>	<b>III</b>	<b>IV</b>
Acetone, methanol, DI H <sub>2</sub> O	Acetone, methanol, DI H <sub>2</sub> O	Acetone, methanol, DI H <sub>2</sub> O	Acetone, methanol, DI H <sub>2</sub> O
H <sub>3</sub> PO <sub>4</sub> :H <sub>2</sub> O <sub>2</sub> :H <sub>2</sub> O 1:10:10	H <sub>2</sub> SO <sub>4</sub> :H <sub>2</sub> O <sub>2</sub> :H <sub>2</sub> O 1:8:80	NH <sub>4</sub> OH:H <sub>2</sub> O <sub>2</sub> 1:700	HF:H <sub>2</sub> O 20:1
HCL:H <sub>2</sub> O 1:1	HCL:H <sub>2</sub> O 1:1		
DI H <sub>2</sub> O	DI H <sub>2</sub> O	DI H <sub>2</sub> O	DI H <sub>2</sub> O
N <sub>2</sub> blow	N <sub>2</sub> blow	N <sub>2</sub> blow	N <sub>2</sub> blow

**TABLE 2. X-ray peak intensity ratios.**

<b>Sample</b>	<b>Ag(111)/Ag(110) Two-Theta Intensity Ratio</b>
I	0.082
II	0.32
III	1.4
IV	3.5

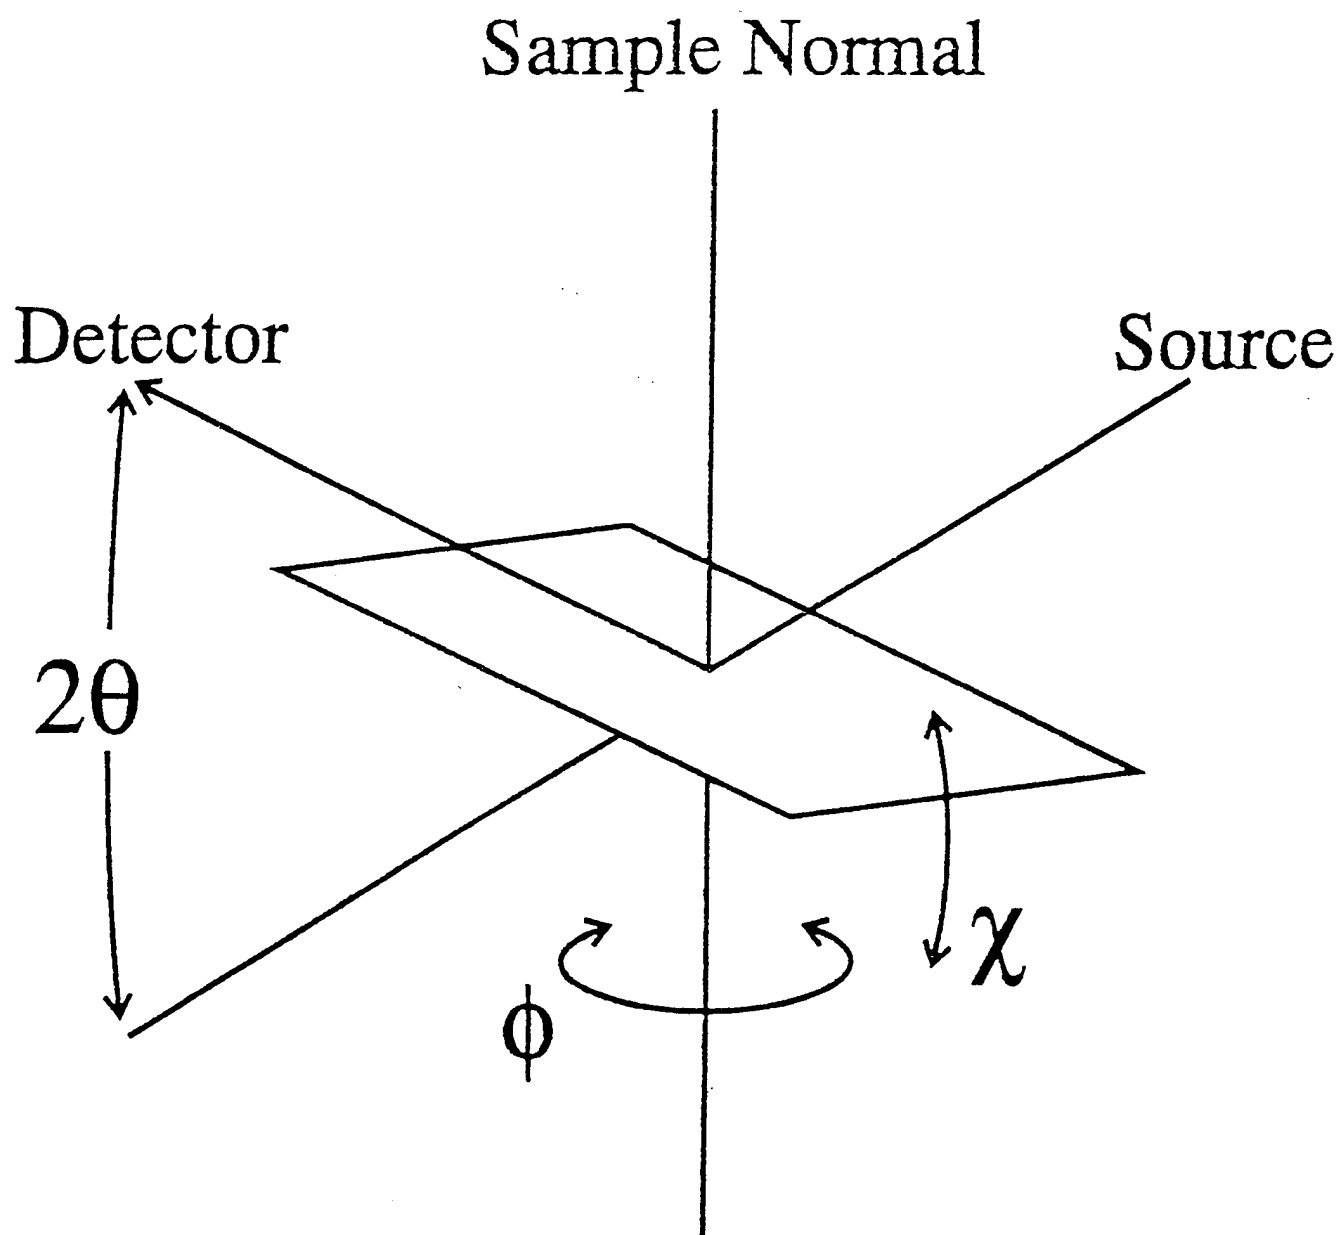


Figure 1 Specimen geometry relative to the x-ray source and detector, showing angles  $2\theta$ ,  $\chi$ , and azimuthal angle  $\phi$ .



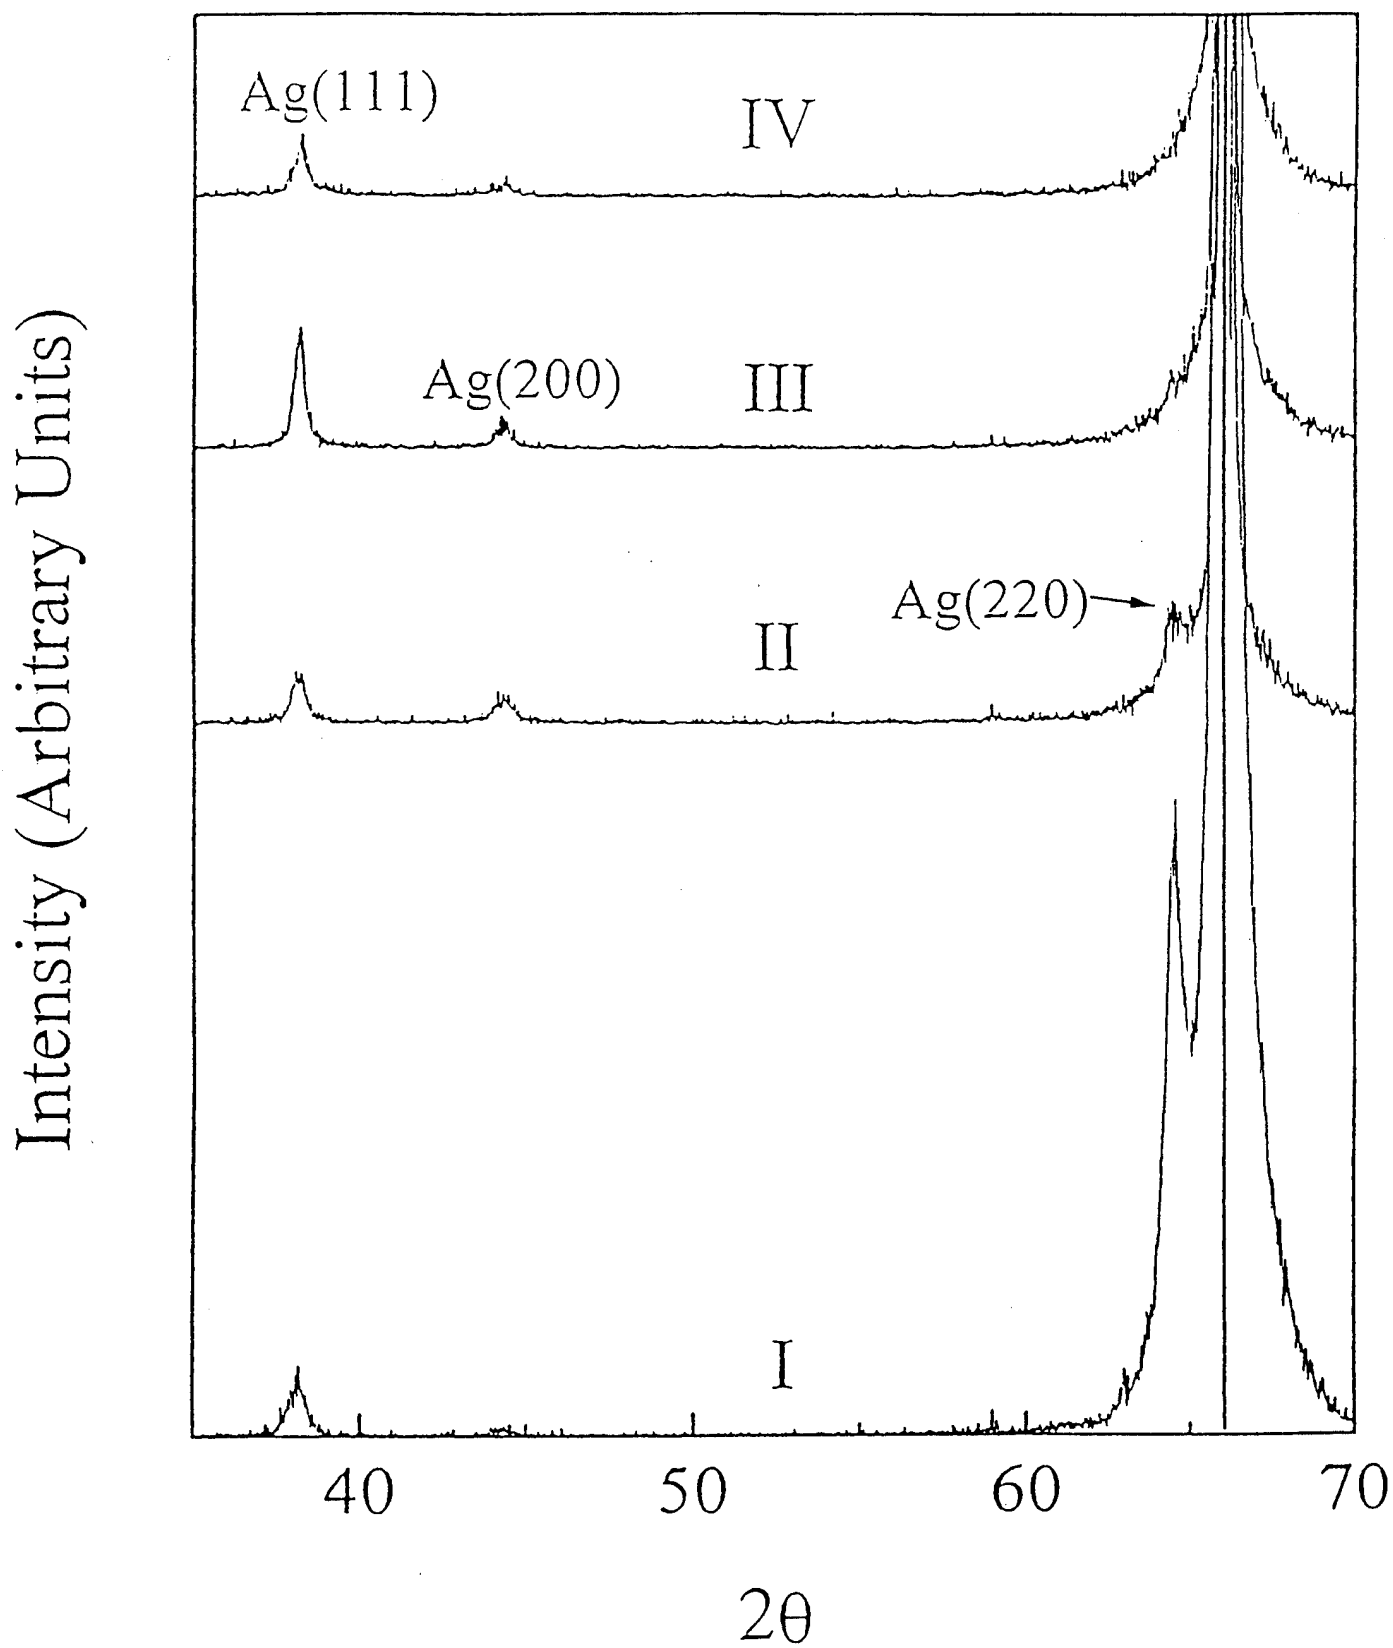


FIGURE 2.  $2\theta$  scans representing the four different wet etches of GaAs(100). All four Ag films had identical deposition conditions.


I

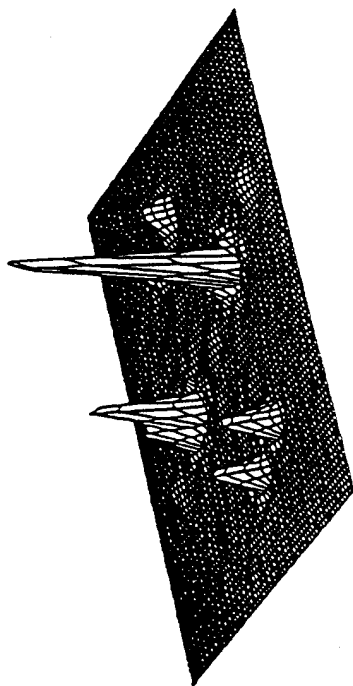

II

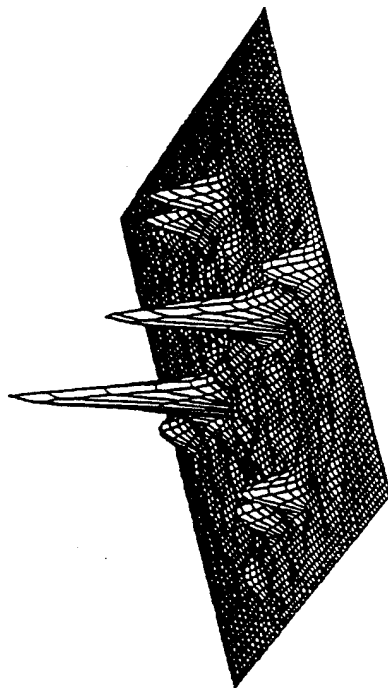

III

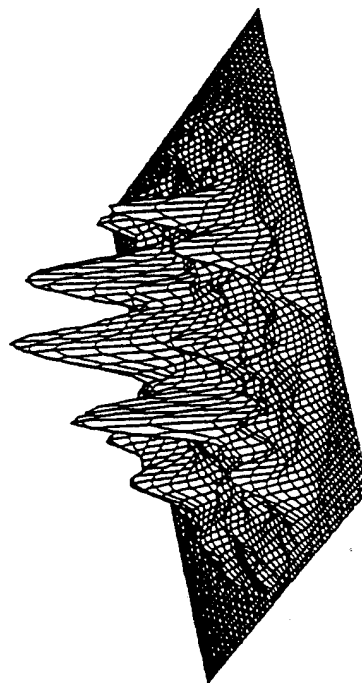

IV

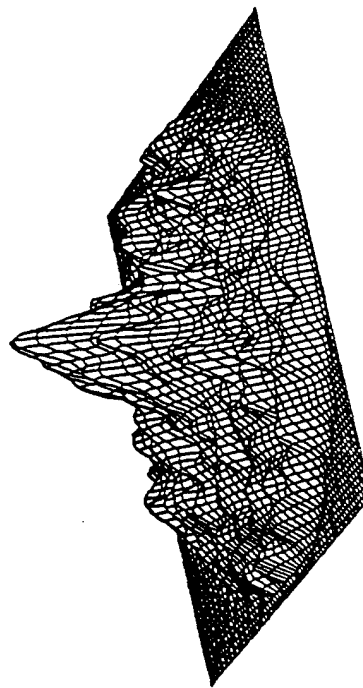


FIGURE 3. 3-D stereographic projections showing the Ag(111) poles. In samples I and II, the predominant poles present are from Ag(110) grains. In sample III, poles from Ag(110) and Ag(111) grains are visible (note the central (111) peak), whereas sample IV contains randomly oriented (111) grains almost exclusively.

Intensity (Arbitrary Units)

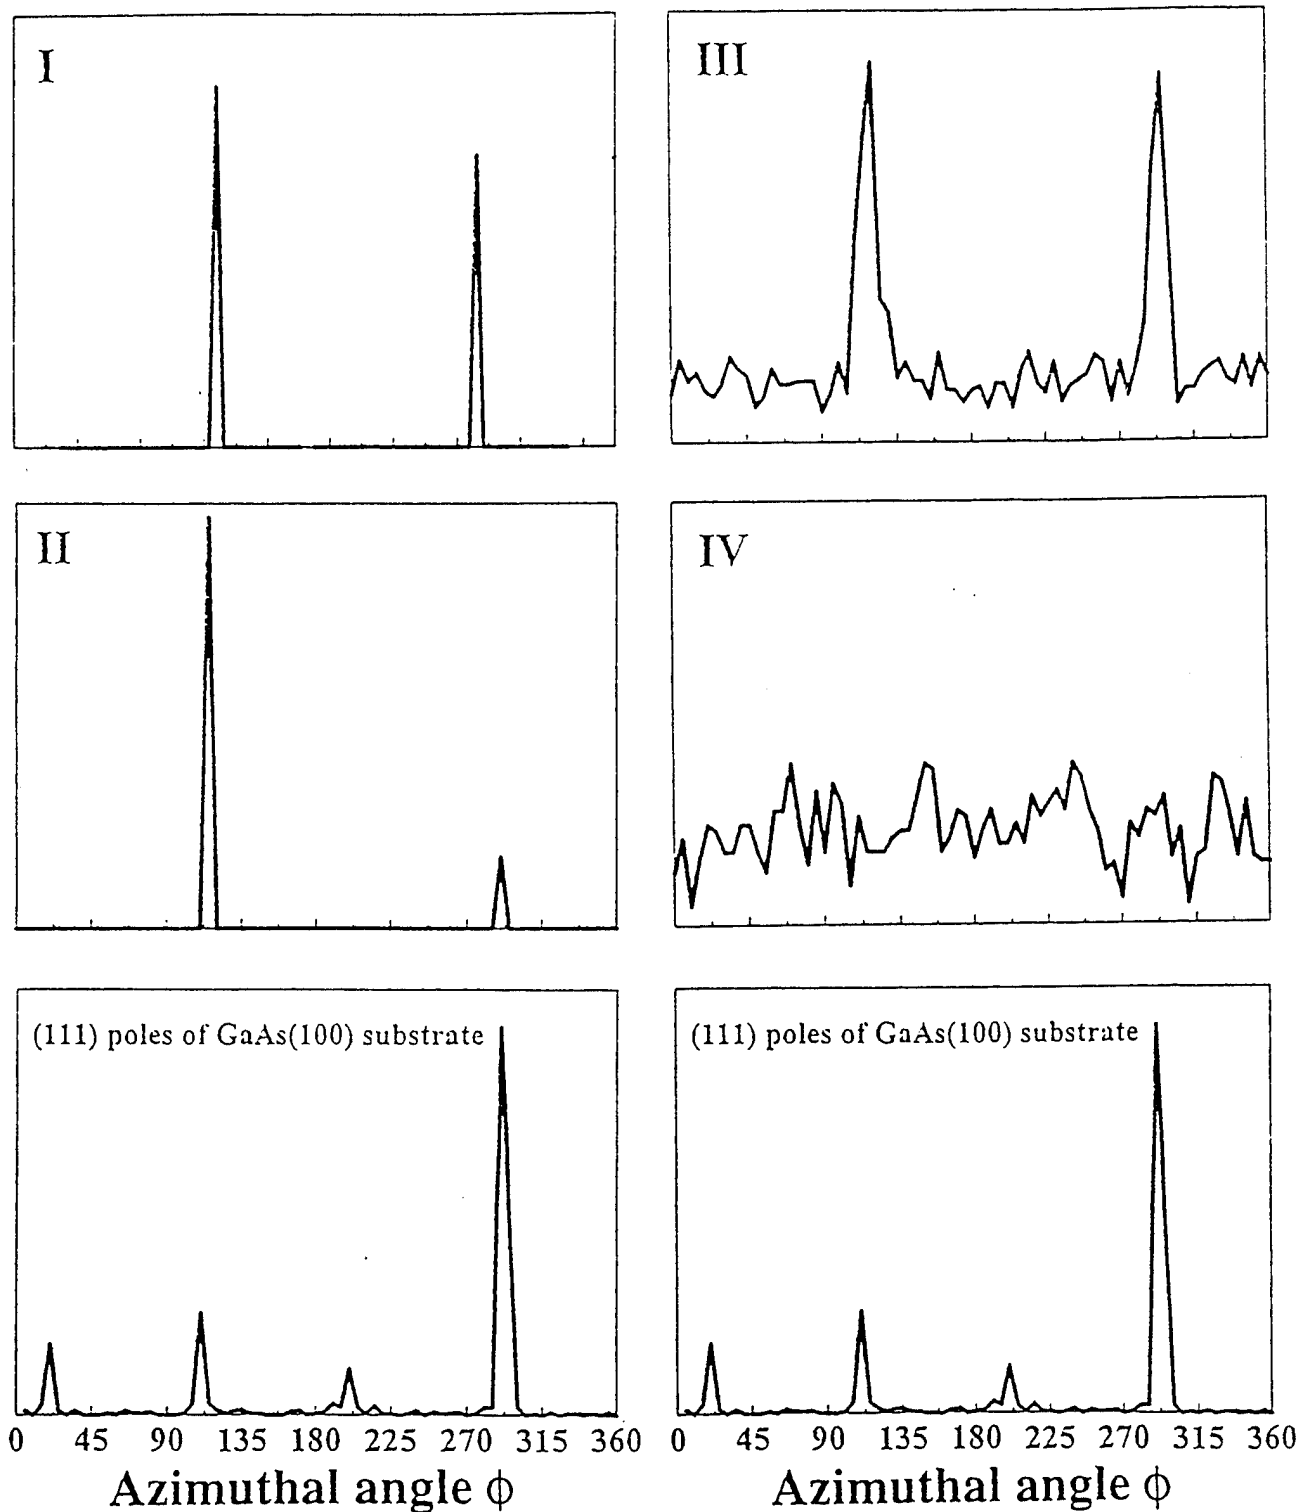


FIGURE 4. Ag(110) on GaAs(100)  $\chi$  scans, showing the azimuthal character of the epitaxy using the four cleaning techniques.

---

TECHNICAL REPORT INTERNAL DISTRIBUTION LIST

	<u>NO. OF COPIES</u>
CHIEF, DEVELOPMENT ENGINEERING DIVISION	
ATTN: AMSTA-AR-CCB-DA	1
-DB	1
-DC	1
-DD	1
-DE	1
CHIEF, ENGINEERING DIVISION	
ATTN: AMSTA-AR-CCB-E	1
-EA	1
-EB	1
-EC	1
CHIEF, TECHNOLOGY DIVISION	
ATTN: AMSTA-AR-CCB-T	2
-TA	1
-TB	1
-TC	1
TECHNICAL LIBRARY	
ATTN: AMSTA-AR-CCB-O	5
TECHNICAL PUBLICATIONS & EDITING SECTION	
ATTN: AMSTA-AR-CCB-O	3
OPERATIONS DIRECTORATE	
ATTN: SIOWV-ODP-P	1
DIRECTOR, PROCUREMENT & CONTRACTING DIRECTORATE	
ATTN: SIOWV-PP	1
DIRECTOR, PRODUCT ASSURANCE & TEST DIRECTORATE	
ATTN: SIOWV-QA	1

NOTE: PLEASE NOTIFY DIRECTOR, BENÉT LABORATORIES, ATTN: AMSTA-AR-CCB-O OF ADDRESS CHANGES.

---

---

TECHNICAL REPORT EXTERNAL DISTRIBUTION LIST

	<u>NO. OF COPIES</u>		<u>NO. OF COPIES</u>
ASST SEC OF THE ARMY RESEARCH AND DEVELOPMENT ATTN: DEPT FOR SCI AND TECH THE PENTAGON WASHINGTON, D.C. 20310-0103	1	COMMANDER ROCK ISLAND ARSENAL ATTN: SMCRI-SEM ROCK ISLAND, IL 61299-5001	1
DEFENSE TECHNICAL INFO CENTER ATTN: DTIC-OCF (ACQUISITIONS) 8725 JOHN J. KINGMAN ROAD STE 0944 FT. BELVOIR, VA 22060-6218	2	MIAC/CINDAS PURDUE UNIVERSITY 2595 YEAGER ROAD WEST LAFAYETTE, IN 47906-1398	1
COMMANDER U.S. ARMY ARDEC ATTN: AMSTA-AR-AEE, BLDG. 3022	1	COMMANDER U.S. ARMY TANK-AUTMV R&D COMMAND ATTN: AMSTA-DDL (TECH LIBRARY) WARREN, MI 48397-5000	1
AMSTA-AR-AES, BLDG. 321	1	COMMANDER	
AMSTA-AR-AET-O, BLDG. 183	1	U.S. MILITARY ACADEMY	
AMSTA-AR-FSA, BLDG. 354	1	ATTN: DEPARTMENT OF MECHANICS	1
AMSTA-AR-FSM-E	1	WEST POINT, NY 10966-1792	
AMSTA-AR-FSS-D, BLDG. 94	1		
AMSTA-AR-IMC, BLDG. 59	2	U.S. ARMY MISSILE COMMAND	
PICATINNY ARSENAL, NJ 07806-5000		REDSTONE SCIENTIFIC INFO CENTER	2
		ATTN: AMSMI-RD-CS-R/DOCUMENTS BLDG. 4484	
DIRECTOR U.S. ARMY RESEARCH LABORATORY ATTN: AMSRL-DD-T, BLDG. 305 ABERDEEN PROVING GROUND, MD 21005-5066	1	REDSTONE ARSENAL, AL 35898-5241	
		COMMANDER	
		U.S. ARMY FOREIGN SCI & TECH CENTER	
		ATTN: DRXST-SD	1
DIRECTOR U.S. ARMY RESEARCH LABORATORY ATTN: AMSRL-WT-PD (DR. B. BURNS) ABERDEEN PROVING GROUND, MD 21005-5066	1	220 7TH STREET, N.E. CHARLOTTESVILLE, VA 22901	
		COMMANDER	
		U.S. ARMY LABCOM, ISA	
		ATTN: SLCIS-IM-TL	1
DIRECTOR U.S. MATERIEL SYSTEMS ANALYSIS ACTV ATTN: AMXSY-MP ABERDEEN PROVING GROUND, MD 21005-5071	1	2800 POWER MILL ROAD ADELPHI, MD 20783-1145	

NOTE: PLEASE NOTIFY COMMANDER, ARMAMENT RESEARCH, DEVELOPMENT, AND ENGINEERING CENTER,  
BENÉT LABORATORIES, CCAC, U.S. ARMY TANK-AUTOMOTIVE AND ARMAMENTS COMMAND,  
AMSTA-AR-CCB-O, WATERVLIET, NY 12189-4050 OF ADDRESS CHANGES.

---



---



# TECHNICAL REPORT EXTERNAL DISTRIBUTION LIST (CONT'D)

	<u>NO. OF COPIES</u>		<u>NO. OF COPIES</u>
COMMANDER U.S. ARMY RESEARCH OFFICE ATTN: CHIEF, IPO P.O. BOX 12211 RESEARCH TRIANGLE PARK, NC 27709-2211	1	WRIGHT LABORATORY ARMAMENT DIRECTORATE ATTN: WL/MNM EGLIN AFB, FL 32542-6810	1
DIRECTOR U.S. NAVAL RESEARCH LABORATORY ATTN: MATERIALS SCI & TECH DIV WASHINGTON, D.C. 20375	1	WRIGHT LABORATORY ARMAMENT DIRECTORATE ATTN: WL/MNMF EGLIN AFB, FL 32542-6810	1

NOTE: PLEASE NOTIFY COMMANDER, ARMAMENT RESEARCH, DEVELOPMENT, AND ENGINEERING CENTER,  
BENÉT LABORATORIES, CCAC, U.S. ARMY TANK-AUTOMOTIVE AND ARMAMENTS COMMAND,  
AMSTA-AR-CCB-O, WATERVLIET, NY 12189-4050 OF ADDRESS CHANGES.

---